

10/25/99
1c713 U.S. PTO

THE COMMISSIONER OF PATENTS AND TRADEMARKS
Washington D.C. 20231
Box Patent Applications

Case Docket No. FUJR 16.535
Filed by Express Mail
(Receipt No. EM366876357US)
on October 25, 1999
pursuant to 37 CFR 1.10
by L. Helfgott

1c584 U.S. PTO
09/426654
10/25/99

S I R:

Transmitted herewith for filing is: ☒ a new application
☐ a c-i-p application of S.N. _____ filed _____

Inventor(s): Kenji NEMOTO

For: RADIO COMMUNICATION SYSTEM AND METHOD

Enclosed are:

- ☒ 16 sheets of drawings. (Figs.1-16)
- ☒ Specification, including claims and abstract (37 pages)
- ☒ Declaration
- ☒ An assignment of the Invention to FUJITSU LIMITED
- ☒ A certified copy of Japanese Application No. 11-073178
- ☒ An associate power of attorney
- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
- ☒ Post card
- ☒ Recording fee (as indicated below)
- ☐ Information Disclosure Statement, PTO-1449, copies of ____ references
- ☐ Other _____
- ☐ Other _____

	Col. 1	Col. 2
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	15-20 =	0
INDEP CLAIMS	8-3 =	5
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

*If the difference in Col. 1 is less than zero, enter "0" in Col. 2

SMALL ENTITY	
RATE	FEE
	\$380
x 9 =	\$
x 39 =	\$
x 130 =	\$
TOTAL	\$

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$760
x 18 =	\$
x 78 =	\$390
x 260 =	\$
TOTAL	\$1150

☐ Please charge our Deposit Account No. 08-1634 the amount of _____ to cover the filing fee and recording fee (if any)

☒ A check in the amount of \$1190.00 to cover the filing fee and the recording fee (if any) is enclosed.

☒ The Commissioner is hereby authorized to charge payment of any fee associated with this communication or credit overpayment to Deposit Account No. 08-1634. A duplicate copy of this sheet is enclosed.

Helfgott & Karas, P.C.
60th Floor
Empire State Building
New York, New York 10118-6098
(212)643-5000

Respectfully Submitted,

Date: October 25, 1999

Any fee due with this paper, not fully covered by an enclosed check, may be charged on Deposit Acct No. 08-1634

- ☐ Aaron B. Karas, Reg. No. 18,923
- ☒ Samson Helfgott, Reg. No. 23,072
- ☐ Leonard Cooper, Reg. No. 27, 625
- ☐ Linda S. Chan, Reg. No. 42,400
- ☐ Jacqueline M. Steady, Reg. No. 44,354
- ☐ Harris Wolin, Reg. No. 39,432

RADIO COMMUNICATION SYSTEM AND METHOD

BACKGROUND OF THE INVENTION

(1) Field of the Invention

5 The present invention relates to radio communication system and method, and more particularly, to radio communication system and method for performing radio communication control of a system adopting TDMA-TDD.

(2) Description of the Related Art

10 In radio communications, a large number of users share a common frequency band to communicate with their respective parties, and accordingly, in order to prevent interference of communications between unintended parties, TDMA (Time Division Multiple Access) is widely used on a
15 practical basis in which time is divided for individual users so that an identical frequency may be shared by multiple users.

 In PHS (Personal Handyphone System) or SU (Subscriber Unit) which is a fixed subscriber terminal unit
20 installed at home etc. for the purpose of communications, TDD (Time Division Duplexing) transmission is carried out in which transmission and reception are performed alternately in time, using an identical carrier wave. Such TDMA-TDD systems permit efficient use of an allotted frequency band.

25 FIG. 15 illustrates an arrangement of slots in a TDMA-TDD frame. With respect to the frequency from one radio base station, four channels of transmitting slots TX1

to TX4 and receiving slots RX1 to RX4 are multiplexed in one frame (384 Kbps) of 5 ms long.

To prevent collision of radio signals from being caused due to propagation delay difference, clock jitter or the like, a frame is provided with guard bits g of 16 bits long. Each of TX and RX consists of 240 bits, inclusive of the guard bits g .

SU1, which is located at a short distance from the radio base station, receives down data from the radio base station in a slot time of the transmitting slot TX1, and upon lapse of a fixed time (2.5 msec) from the reception, outputs up data. The radio base station can receive the up data from the SU1 located at a short distance therefrom in the receiving slot RX1.

On the other hand, SU2, which is located relatively distantly from the radio base station, receives down data from the radio base station in a slot time of the transmitting slot TX2 after a delay of a propagation delay time td_0 .

Accordingly, for the radio base station, the output of up data from the SU2 is delayed for a time (2.5 msec + td_0), but since the delay is within the range of protection of the guard bits g as shown in the figure, the radio base station can receive the up data from the SU2 in the receiving slot RX2.

The conventional TDMA-TDD technique described above is, however, associated with a problem that the

coverage (service area) cannot be expanded even if the output power of the radio base station or SU is increased.

FIG. 16 illustrates the problem with the conventional TDMA-TDD. SU3, which is located at a long distance from the radio base station, receives down data from the radio base station in a slot time of the transmitting slot TX3 after a delay of a propagation delay time td_1 .

Accordingly, for the radio base station, the output of up data from the SU3 is delayed for a time ($2.5 \text{ msec} + td_1$); in this case, the delay is outside the range of protection of the guard bits g , as shown in the figure, and the up data spans the receiving slots RX3 and RX4. Consequently, the radio base station is incapable of reception in the receiving slots RX3 and RX4, with the result that the number of usable time slots decreases.

Thus, the SU3 located at a long distance from the radio base station is unable to communicate with the radio base station, so that data transmission/reception needs to be performed with respect to some other radio base station located at a shorter distance from the SU3.

Accordingly, where a plurality of SUs are installed, the number of radio base stations installed must be increased correspondingly to cover these SUs, but it is desirable from an economical viewpoint that more SUs be covered by the least possible number of radio base stations.

SUMMARY OF THE INVENTION

One object of the present invention is to provide a radio communication system which permits expansion of the coverage of a radio base station and ensures efficient communications.

To achieve the above object, there is provided a radio communication system for performing radio communication control. The radio communication system comprises a propagation information calculation device including continuous time slot allocating means for continuously allocating time slots in a frame to generate a continuous time slot, and propagation information calculating means for communicating with a terminal unit during a period of the continuous time slot to calculate propagation information about radio wave propagation between a radio base station and the terminal unit, and a transmission timing calculation device including transmission timing calculating means for calculating, during the period of the continuous time slot and based on the propagation information, transmission timing for signal to be transmitted from the terminal unit to the radio base station, and signal transmitting means for transmitting the signal in accordance with the transmission timing.

Another object of the present invention is to provide a radio communication method which permits expansion of the coverage of a radio base station and ensures efficient communications. The radio communication method

comprises continuously allocating time slots in a frame to generate a continuous time slot, communicating with a terminal unit during a period of the continuous time slot to calculate propagation information about radio wave
5 propagation between a radio base station and the terminal unit, calculating, during the period of the continuous time slot and based on the propagation information, transmission timing for signal to be transmitted from the terminal unit to the radio base station, and transmitting the signal in
10 accordance with the transmission timing.

The above and other objects, features and advantages of the present invention will become apparent from the following description when taken in conjunction with the accompanying drawings which illustrate preferred
15 embodiments of the present invention by way of example.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a diagram illustrating the principle of a radio communication system according to the present
20 invention;

FIG. 2 is a diagram illustrating continuous time slot and transmission timing;

FIG. 3 is a diagram illustrating an outline of WLL configuration;

25 FIG. 4 is a diagram illustrating allocation of continuous time slots;

FIG. 5 is a diagram illustrating a superframe in

one frame of which are allocated continuous time slots for two radio base stations;

FIG. 6 is a chart showing a transmission timing calculation sequence;

5 FIG. 7 is a flowchart showing a procedure of a radio communication method according to the present invention;

10 FIG. 8 is a diagram illustrating the principle of a radio communication system according to a modification of the invention;

FIG. 9 is a chart showing a transmission timing calculation sequence;

FIG. 10 is a diagram showing a BCCH format structure;

15 FIG. 11 is a flowchart showing a procedure of a radio communication method according to the present invention;

FIG. 12 is a chart showing a location registration sequence;

20 FIG. 13 is a chart showing a call origination sequence;

FIG. 14 is a chart showing a call termination sequence;

25 FIG. 15 is a diagram showing an arrangement of slots in a TDMA-TDD frame; and

FIG. 16 is a diagram illustrating a problem with conventional TDMA-TDD.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments of the present invention will be hereinafter described with reference to the drawings. FIG.

5 1 illustrates the principle of a radio communication system according to the present invention. A radio communication system 1 comprises a propagation information calculation device 10 and a transmission timing calculation device 20.

The propagation information calculation device 10
10 is arranged in a radio base station 100, and the transmission timing calculation device 20 is arranged in a terminal unit 200 connected to a telephone etc. Radio communication is established between the terminal unit 200 and the radio base station 100 via their antennas.

15 The description below is based on the assumption that the terminal unit 200 is a subscriber terminal unit which performs communication at a fixed location.

In the propagation information calculation device 10, continuous time slot allocating means 11 continuously
20 allocates time slots in a TDMA-TDD frame to generate a continuous time slot.

Specifically, a continuous time slot is a combination of one control time slot and expanded guard bits and corresponds to two time slots, as described later with
25 reference to FIG. 2.

During the period of the continuous time slot, propagation information calculating means 12 communicates

with the terminal unit 200 and calculates propagation information about radio wave propagation between the radio base station 100 and the terminal unit 200.

Specifically, first, test data is transmitted to
5 the terminal unit 200. Then, the time required until the reception of the test data sent back from the terminal unit 200 is measured to calculate, as the propagation information, a radio wave propagation time or distance (= radio wave propagation time*light speed) between the radio base station
10 100 and the terminal unit 200.

During the period of the continuous time slot, transmission timing calculating means 21 of the terminal unit 200 calculates, based on the propagation information, transmission timing for a signal to be transmitted from the
15 terminal unit 200 to the radio base station 100.

Namely, "advanced" timing is calculated such that it is timed with the timing of a corresponding receiving slot of the radio base station 100. In accordance with the calculated transmission timing, signal transmitting means 22
20 transmits signal to the radio base station 100.

The transmission timing calculation device 20 also stores the calculated transmission timing information in a nonvolatile memory (not shown) such as a flash memory. This eliminates the need to again perform the transmission timing
25 calculation process when communication with the radio base station 100 is started.

The continuous time slot and the transmission

timing will be now described. FIG. 2 illustrates the continuous time slot and the transmission timing. In ordinary frames, four channels of transmitting slots TX1 to TX4 and receiving slots RX1 to RX4 are multiplexed to
5 constitute one frame.

First, a time notification request, described later, is transmitted from the terminal unit 200 to the radio base station 100, whereupon the continuous time slot allocating means 11 allocates continuous time slots as shown
10 in the figure.

Specifically, an up continuous time slot Ta consisting of a transmitting slot TX1 and a time slot, which comprises guard bits extending up to a transmitting slot TX2, and a down continuous time slot Ra consisting of a receiving
15 slot RX1 and a time slot, which comprises guard bits extending up to a receiving slot RX2, are generated.

The terminal unit 200, which is located at a long distance from the radio base station 100, receives down data from the radio base station 100 at the illustrated time
20 after a delay of a propagation delay time td_2 .

Accordingly, for the radio base station 100, the output of up data from the terminal unit 200 is delayed for a time $(2.5 \text{ msec} + td_2)$ (2.5 msec is a predetermined time period from the detection of down data to the transmission
25 of up data). However, since the continuous time slot Ra has an expanded range of protection provided by the guard bits as illustrated, the radio base station 100 can receive the

up data from the terminal unit 200 in the continuous time slot Ra (the up data is received virtually in RX1 with expanded guard bits).

During the period of the thus-allocated continuous time slot, therefore, the propagation information calculating means 12 creates propagation information by exchanging down data and up data between the radio base station 100 and the terminal unit 200 (between the radio base station 100 and the terminal unit 200 separated at such a distance from each other that normal communication can be established therebetween during the period of the allocated continuous time slot, without data riding into other time slots).

Also, during the period of the allocated continuous time slot, the transmission timing calculating means 21 calculates, based on the calculated propagation information, transmission timing (advanced timing) t such that up data can be timely received in the receiving slot RX1.

Once the transmission timing t is determined, allocation of the continuous time slot is canceled. Although the terminal unit 200 thereafter receives down data in the transmitting slot TX1 after a delay of the propagation delay time td_2 , it transmits up data earlier at the advanced transmission timing t , so that the up data can be timely received in the receiving slot RX1.

Thus, in the radio communication system 1

according to the present invention, a continuous time slot is generated, propagation information is calculated during the period of the continuous time slot, and transmission timing t is calculated based on the propagation information to transmit signal.

According to the present invention, therefore, the coverage can be expanded so as to cover the terminal unit 200 which is located at a long distance from the radio base station 100 and thus is otherwise outside the coverage of the radio base station 100, so that the terminal unit 200 can be serviced by the radio base station 100.

Also, since the coverage is expanded, the total number of radio base stations may be small and time slots can be made good use of, thus permitting economical and efficient radio communications.

WLL (Wireless Local Loop) to which the radio communication system 1 of the present invention is applied will be now described. FIG. 3 illustrates an outline of WLL configuration. WLL is a system that allows wireless connection between a subscriber-side exchange and a subscriber's home, which were conventionally connected by a wireline.

A WLL system comprises a public network including an exchange 61, a base station control device 50, and a plurality of coverage areas C1 and C2.

The coverage C1 includes a radio base station 101 and subscriber terminal units 201 and 202, and the coverage

C2 includes a radio base station 102 and a subscriber terminal unit 203. Telephones are connected to the respective subscriber terminal units 201 to 203.

The base station control device 50 connects the
5 exchange 61 to each of the radio base stations 101 and 102 by a wireline link, and controls the radio base stations 101 and 102. The subscriber terminal units 201 and 202 are each connected to the radio base station 101 by a wireless link, and perform subscriber radio control for the wireless
10 connection between the telephone connected thereto and the radio base station 101.

Similarly, the subscriber terminal unit 203 is connected to the radio base station 102 by a wireless link, and performs subscriber radio control for the wireless
15 connection between the telephone connected thereto and the radio base station 102.

In the WLL system described above, if the coverage C1 of the radio base station 101 can be expanded so as to cover not only the subscriber terminal units 201 and 202 but
20 also the subscriber terminal unit 203 located at a long distance from the radio base station 101, then the number of radio base stations can be reduced, which is preferable from an economical viewpoint. The present invention makes it possible to expand the coverage of a radio base station,
25 thereby permitting efficient radio communications.

As such WLL system, PHS-WLL system in particular, which uses a data transmission method complying with PHS,

has been recently developed, and it is generally the case that the subscriber terminal unit has a network-initiated type construction like PHS terminal.

The continuous time slot allocating means 11 will
5 be now described. FIG. 4 shows how continuous time slots are allocated.

In TDMA-TDD, four channels of transmitting slots TX1 to TX4 and receiving slots RX1 to RX4, each being a time slot of 625 μ s long, are multiplexed to constitute one frame
10 of 5 ms long. Twenty such frames are combined to constitute a superframe SF (100 ms).

In the first frame of the superframe SF, down time slots TX1 and TX2 and up time slots RX1 and RX2 are allocated to BTE (Base Transceiver Equipment: radio base
15 station) 1 as continuous time slots.

BTE 2 is allocated, as continuous time slots, down time slots TX2 and TX3 and up time slots RX2 and RX3 of the second frame.

By allocating continuous time slots in this manner,
20 up to BTE 20 can be allocated continuous time slots in the superframe SF.

Namely, the BTE 20 is allocated down time slots TX2 and TX3 and up time slots RX2 and RX3 of the twentieth frame as continuous time slots.

25 Alternatively, in one frame, continuous time slots of two radio base stations may be allocated. FIG. 5 shows a superframe SF in which continuous time slots of two radio

base stations are allocated to one frame.

The BTE 1 is allocated down time slots TX1 and TX2 and up time slots RX1 and RX2 of the first frame as continuous time slots. The BTE 2 is allocated down time slots TX3 and TX4 and up time slots RX3 and RX4 of the first frame as continuous time slots.

By allocating continuous time slots in this manner, up to BTE 40 can be allocated continuous time slots in the superframe SF.

10 Namely, down time slots TX1 and TX2 and up time slots RX1 and RX2 of the twentieth frame are allocated to BTE 39 as continuous time slots, and down time slots TX3 and TX4 and up time slots RX3 and RX4 of the twentieth frame are allocated to the BTE 40 as continuous time slots.

15 If all of the time slots of one superframe SF are allocated in this manner, then a maximum of 40 radio base stations can be allocated continuous time slots.

In either of the cases shown in FIGS. 4 and 5, however, the continuous time slot is never allocated in such a manner as to span the boundary between the transmitting and receiving slots TX and RX.

After the transmission timing t is calculated following the allocation of continuous time slots, the allocation of continuous time slots is canceled. Thereafter, ordinary TDMA-TDD is resumed in which communication is performed while using one slot of each set of the transmitting slots TX and the receiving slots RX as a

control time slot and the remaining time slots as bearer time slots.

The following describes a sequence in which communication is performed between the radio base station 100 and the terminal unit 200 to calculate the transmission timing t. FIG. 6 shows the transmission timing t calculation sequence.

[S1] Using SCCH (Signaling Control Channel: cell associated channel) which is a control channel, the terminal unit 200 transmits a time notification request to the radio base station 100. The SCCH is a control channel which is used when information necessary for call connection is transferred between the radio base station 100 and the terminal unit 200.

[S2] The continuous time slot allocating means 11 of the radio base station 100 allocates up and down time slots to continuous time slots.

[S3] The continuous time slot allocating means 11 transmits test data to the terminal unit 200. Also, an internal timer is started and the time at which the test data was transmitted is stored.

[S4] The terminal unit 200 receives the test data and sends it back to the radio base station 100.

If the test data is not returned from the terminal unit 200 and the timer in the continuous time slot allocating means 11 signals time-out, Steps S3 and S4 are repeated.

[S5] The propagation information calculating means 12 of the radio base station 100 receives the test data sent back from the terminal unit 200 and detects the time at which the data was received. Then, based on the time stored in Step S3 and the reception time, a radio wave propagation time or distance between the radio base station 100 and the terminal unit 200 is calculated. It is here assumed that the propagation time is calculated.

[S6] The propagation time is transmitted to the terminal unit 200 as the propagation information.

[S7] Based on the propagation time, the transmission timing calculating means 21 calculates transmission timing t in accordance with which signal is to be transmitted from the terminal unit 200 to the radio base station 100.

Namely, advanced timing is calculated such that it is timed with the timing of a corresponding receiving slot of the radio base station 100.

[S8] In accordance with the transmission timing t thus obtained, the terminal unit 200 transmits a link channel establishment request to the radio base station 100 by using the SCCH.

[S9] If the link channel establishment request is received normally, the radio base station 100 sends a link channel allocation back to the terminal unit 200 by using the SCCH.

[S10] Location registration, call origination and

call termination are thereafter performed between the radio base station 100 and the terminal unit 200. When the terminal unit 200 transmits up data to the radio base station 100, however, all such data is transmitted by the
5 signal transmitting means 22 in accordance with the transmission timing t calculated in Step S7.

A radio communication method according to the present invention will be now described. FIG. 7 is a flowchart showing a procedure of the radio communication
10 method according to the present invention.

[S20] The time slots in a frame are continuously allocated to generate continuous time slots.

[S21] During the period of the continuous time slot, communication with the terminal unit is performed to
15 calculate propagation information about the radio wave propagation between the radio base station and the terminal unit.

To calculate the propagation information, a time period from the transmission of test data to the terminal
20 unit to the reception of the test data returned from the terminal unit is measured, and a radio wave propagation time or distance between the radio base station and the terminal unit is calculated.

[S22] During the period of the continuous time
25 slot, transmission timing in accordance with which signal is to be transmitted from the terminal unit to the radio base station is calculated based on the propagation information.

[S23] Signal is transmitted in accordance with the transmission timing.

As described above, in the radio communication system 1 and method according to the present invention, continuous time slots are generated, and during the period of the continuous time slot, communication with the terminal unit 200 is performed to calculate propagation information about the radio wave propagation between the radio base station 100 and the terminal unit 200 and transmission timing t is calculated based on the propagation information for transmitting signal.

This makes it possible to expand the coverage of the radio base station 100, thus permitting efficient radio communications.

Also, since the transmission timing t is automatically determined during communication between the radio base station 100 and the terminal unit 200, neither the radio base station 100 nor the terminal unit 200 requires special engineering work or the like, whereby operation efficiency and maintainability are improved.

A modification of the radio communication system 1 of the present invention will be now described. FIG. 8 illustrates the principle of the modification of the radio communication system 1.

A radio communication system 2, which is a modification of the present invention, comprises a base station location information acquisition device 30 and a

transmission timing calculation device 40.

The base station location information acquisition device 30 is arranged in the radio base station 100, and the transmission timing calculation device 40 is arranged in the terminal unit 200 connected to a telephone etc. The terminal unit 200 and the radio base station 100 perform radio communication with each other via their antennas. The terminal unit 200 corresponds to the subscriber terminal unit.

10 In the base station location information acquisition device 30, base station location information acquiring means 31 acquires base station location information which is information about the location of the radio base station 100.

15 For example, using GPS (Global Positioning System) which is a satellite-assisted positioning system, etc., base station location information is acquired. Base station location information notifying means 32 notifies the terminal unit 200 of the base station location information.

20 Terminal location information acquiring means 41 of the transmission timing calculation device 40 acquires terminal location information which is information about the location of the terminal unit 200.

Using GPS which is a satellite-assisted positioning system, etc., for example, terminal location information is acquired.

Based on the base station location information and

the terminal location information, propagation information calculating means 42 calculates propagation information about radio wave propagation between the radio base station 100 and the terminal unit 200. Specifically, a radio wave propagation time or distance (= radio wave propagation time*light speed) between the radio base station 100 and the terminal unit 200 is calculated as the propagation information.

Based on the propagation information, transmission timing calculating means 43 calculates transmission timing for signal to be transmitted from the terminal unit 200 to the radio base station 100. The transmission timing is identical with the aforementioned advanced timing. In accordance with the transmission timing, signal transmitting means 44 transmits signal to the radio base station 100.

Also, the transmission timing calculation device 40 stores information on the calculated transmission timing in a nonvolatile memory (not shown) such as a flash memory.

The following describes a sequence in which communication between the radio base station 100 and the terminal unit 200 is performed to calculate transmission timing. FIG. 9 illustrates the transmission timing calculation sequence.

[S30] The base station location information acquiring means 31 of the radio base station 100 acquires base station location information which is information about its own location, by means of GPS.

[S31] The terminal location information acquiring means 41 of the terminal unit 200 acquires terminal location information which is information about its own location, by means of GPS.

5 [S32] Using BCCH (Broadcast Control Channel) which is a control channel, the base station location information notifying means 32 of the radio base station 100 transmits the base station location information to the terminal unit 200 (in practice, the information is broadcast to a
10 plurality of terminal units).

The BCCH is a control channel via which control signal is transmitted from the radio base station 100 to the terminal unit 200.

 [S33] Based on the base station location
15 information and the terminal location information, the propagation information calculating means 42 of the terminal unit 200 calculates propagation information.

 [S34] Based on the propagation information, the transmission timing calculating means 43 calculates
20 transmission timing for signal to be transmitted from the terminal unit 200 to the radio base station 100.

Specifically, advanced timing is calculated such that it is timed with the timing of a corresponding receiving slot of the radio base station 100.

25 [S35] Using the SCCH, the terminal unit 200 transmits a link channel establishment request to the radio base station 100 in accordance with the thus-calculated

transmission timing.

[S36] If the link channel establishment request is normally received, the radio base station 100 sends a link channel allocation back to the terminal unit 200, by using
5 the SCCH.

[S37] Location registration, call origination and call termination are thereafter performed between the radio base station 100 and the terminal unit 200. However, when the terminal unit 200 transmits up data to the radio base
10 station 100, all such data is transmitted by the signal transmitting means 44 in accordance with the transmission timing calculated in Step S34.

The following describes a format structure of the BCCH which is a control channel used by the base station
15 location information notifying means 32 when notifying the base station location information. FIG. 10 shows the BCCH format structure.

The BCCH has a 124-bit structure. CI, which indicates a channel type, consists of 4 bits; an originator
20 identification code, which is a local call sign, consists of 42 bits; I, which is an information section, consists of 62 bits; and CRC consists of 16 bits.

The information section I comprises 8-bit octets 1 to 7 and a 6-bit octet 8. In the octet 1, "RESERVED" is a
25 bit indicative of private or public use, and "MESSAGE TYPE" begins from the seventh bit and indicates that the message is a BCCH message when it has the value (0001001).

In the octet 2, "LCCH INTERVAL VALUE" indicates an intermittent period of slots for down LCCH (logic control channel). The LCCH includes BCCH, PCH, SCCH and USCCH, and is a general term for function channel used in link channel establishment phase.

In the octet 3, "TERMINATION GROUPING FACTOR" indicates a value corresponding to a grouping number of PCH (paging channel) information, and "PAGING AREA NO." indicates, for public use, a bit length of a paging area number of CS-ID (radio base station ID).

In the octets 4 to 7, the base station location information used in the present invention is described. In the figure, four octets are reserved as an area for describing the base station location information therein.

A radio communication method according to the present invention will be now described. FIG. 11 is a flowchart showing a procedure of the radio communication method according to the present invention.

[S40] Base station location information, which is information about the location of the radio base station, is acquired.

[S41] The base station location information is notified.

[S42] Terminal location information, which is information about the location of the terminal unit, is acquired.

[S43] Based on the base station location

information and the terminal location information, propagation information about radio wave propagation between the radio base station and the terminal unit is calculated.

[S44] Based on the propagation information,
5 transmission timing for signal to be transmitted from the terminal unit to the radio base station is calculated.

[S45] Signal is transmitted in accordance with the transmission timing.

As described above, in the radio communication
10 system 2 and method according to the present invention, propagation information about the radio wave propagation between the radio base station 100 and the terminal unit 200 is calculated based on the information about the locations of the radio base station 100 and the terminal unit 200, and
15 transmission timing t is calculated based on the propagation information for transmitting signal.

This makes it possible to expand the coverage of the radio base station 100, thus permitting efficient radio communications.

20 The following describes sequences of location registration, call origination and call termination which are carried out after the transmission timing is determined as described above in the radio communication system 1 or 2 or by the radio communication method. FIG. 12 illustrates
25 the location registration sequence.

To permit connection of an incoming call from the radio base station to the terminal unit, the terminal unit

performs location registration in advance to register its own location in the radio base station.

[S50] A link channel establishment request and a link channel allocation are performed via the SCCH using
5 control time slots.

[S51] The radio base station and the terminal unit establish synchronicity by means of synchronization burst signal.

[S52] The terminal unit makes a location
10 registration request to the radio base station.

[S53] The radio base station sends a location registration acceptance back to the terminal unit.

[S54] The radio base station instructs the terminal unit to disconnect the radio channel.

15 [S55] The terminal unit notifies completion of disconnection of the radio channel.

In Step S51 and the subsequent steps, the bearer time slots are used. All of the transmissions (indicated by dashed arrows) from the terminal unit to the radio base
20 station are performed in accordance with the advanced transmission timing.

FIG. 13 shows the call origination sequence. Call origination is a call connection phase for establishing a service channel (SCH) used for transmission of voice, data,
25 etc. at the request of the terminal unit.

[S60] A link channel establishment request and a link channel allocation are performed via the SCCH using

control time slots.

[S61] The radio base station and the terminal unit establish synchronicity by means of synchronization burst signal.

5 [S62] The terminal unit makes a call set-up with respect to the radio base station.

[S63] The radio base station sends a call set-up acceptance back to the terminal unit.

10 [S64] The radio base station makes a calling to the terminal unit.

[S65] The radio base station transmits RBT (ring back tone) to the terminal unit.

[S66] The radio base station makes a response to the terminal unit.

15 [S67] The terminal unit is permitted conversion via the radio base station.

In Step S61 and the subsequent steps, the bearer time slots are used. All of the transmissions (indicated by dashed arrows) from the terminal unit to the radio base station are performed in accordance with the advanced transmission timing.

20

FIG. 14 shows the call termination sequence. Call termination is a call connection phase for establishing the SCH used for transmission of voice, data, etc. at the request of the network side.

25

[S70a] The radio base station transmits a call termination message (PCH) to the terminal unit to notify

same of an incoming call.

[S70] A link channel establishment request and a link channel allocation are performed via the SCCH using control time slots.

5 [S71] The radio base station and the terminal unit establish synchronicity by means of synchronization burst signal.

[S72] The terminal unit makes a call termination response to the radio base station.

10 [S73] The radio base station makes a call set-up with respect to the terminal unit.

[S74] The terminal unit sends a call set-up acceptance back to the radio base station.

15 [S75] The terminal unit makes a calling to the radio base station.

[S76] The terminal unit makes a response to the radio base station.

[S77] The radio base station sends a response acknowledgment back to the terminal unit.

20 [S78] The terminal unit is permitted conversion via the radio base station.

In Step S71 and the subsequent steps, the bearer time slots are used. All of the transmissions (indicated by dashed arrows) from the terminal unit to the radio base station are performed in accordance with the advanced transmission timing.

25

As described above, in the radio communication

system according to the present invention, continuous time slots are allocated, and during the period of the continuous time slot, communication with a terminal unit is performed to calculate propagation information about radio wave propagation between the radio base station and the terminal unit and transmission timing is calculated based on the propagation information for transmitting signal. This makes it possible to expand the coverage of the radio base station, permitting efficient radio communications.

10 Also, in the radio communication method according to the present invention, continuous time slots are allocated, and during the period of the continuous time slot, communication with a terminal unit is performed to calculate propagation information about radio wave propagation between the radio base station and the terminal unit and transmission timing is calculated based on the propagation information for transmitting signal. This similarly makes it possible to expand the coverage of the radio base station, thus permitting efficient radio communications.

20 Further, in the radio communication system according to the present invention, propagation information about radio wave propagation between the radio base station and the terminal unit is calculated based on the information about the locations of the radio base station and the terminal unit, and based on the propagation information, transmission timing is calculated for transmitting signal. Consequently, the coverage of the radio base station is

expanded and efficient radio communications can be performed.

According to the radio communication method of the present invention, moreover, propagation information about radio wave propagation between the radio base station and the terminal unit is calculated based on the information about the locations of the radio base station and the terminal unit, and based on the propagation information, transmission timing is calculated for transmitting signal. Accordingly, the coverage of the radio base station is expanded, so that efficient radio communications can be performed.

The foregoing is considered as illustrative only of the principles of the present invention. Further, since numerous modifications and changes will readily occur to those skilled in the art, it is not desired to limit the invention to the exact construction and applications shown and described, and accordingly, all suitable modifications and equivalents may be regarded as falling within the scope of the invention in the appended claims and their equivalents.

WHAT IS CLAIMED IS:

1. A radio communication system for performing radio communication control, comprising:

a propagation information calculation device
5 including continuous time slot allocating means for continuously allocating time slots in a frame to generate a continuous time slot, and propagation information
calculating means for communicating with a terminal unit during a period of the continuous time slot to calculate
10 propagation information about radio wave propagation between a radio base station and the terminal unit; and

a transmission timing calculation device including
transmission timing calculating means for calculating,
during the period of the continuous time slot and based on
15 the propagation information, transmission timing for signal to be transmitted from the terminal unit to the radio base station, and signal transmitting means for transmitting the
signal in accordance with the transmission timing.

20 2. The radio communication system according to claim 1, wherein, to calculate the propagation information, said propagation information calculating means measures a time from transmission of test data to the terminal unit to reception of the test data returned from the terminal unit,
25 and calculates a radio wave propagation time or distance between the radio base station and the terminal unit.

3. The radio communication system according to claim 1, wherein said transmission timing calculation device stores information on the calculated transmission timing in a nonvolatile memory.

5

4. The radio communication system according to claim 1, wherein said continuous time slot allocating means cancels allocation of the continuous time slot after the transmission timing is calculated.

10

5. A propagation information calculation device arranged in a radio base station for calculating radio wave propagation information, comprising:

continuous time slot allocating means for
15 continuously allocating time slots in a frame to generate a continuous time slot; and

propagation information calculating means for
communicating with a terminal unit during a period of the
continuous time slot to calculate the radio wave propagation
20 information about radio wave propagation between the radio
base station and the terminal unit.

6. A transmission timing calculation device arranged in a terminal unit for calculating transmission
25 timing for signal, comprising:

transmission timing calculating means for
calculating, during a period of a continuous time slot

generated by continuously allocating time slots,
transmission timing for signal to be transmitted from the
terminal unit to a radio base station in accordance with
propagation information about radio wave propagation between
5 the radio base station and the terminal unit; and

signal transmitting means for transmitting the
signal in accordance with the transmission timing.

7. A radio communication method for performing
10 radio communication control, comprising:

continuously allocating time slots in a frame to
generate a continuous time slot;

communicating with a terminal unit during a period
of the continuous time slot to calculate propagation
15 information about radio wave propagation between a radio
base station and the terminal unit;

calculating, during the period of the continuous
time slot and based on the propagation information,
transmission timing for signal to be transmitted from the
20 terminal unit to the radio base station; and

transmitting the signal in accordance with the
transmission timing.

8. The radio communication method according to
25 claim 7, wherein, to calculate the propagation information,
a time from transmission of test data to the terminal unit
to reception of the test data returned from the terminal

unit is measured to calculate a radio wave propagation time or distance between the radio base station and the terminal unit.

5 9. A radio communication system for performing radio communication control, comprising:

 a base station location information acquisition device including base station location information acquiring means for acquiring base station location information which
10 is information on location of a radio base station, and base station location information notifying means for notifying the base station location information; and

 a transmission timing calculation device including terminal location information acquiring means for acquiring
15 terminal location information which is information on location of a terminal unit, propagation information calculating means for calculating, based on the base station location information and the terminal location information, propagation information about radio wave propagation between
20 the radio base station and the terminal unit, transmission timing calculating means for calculating, based on the propagation information, transmission timing for signal to be transmitted from the terminal unit to the radio base station, and signal transmitting means for transmitting the
25 signal in accordance with the transmission timing.

10. The radio communication system according to

claim 9, wherein said base station location information acquiring means uses a satellite-assisted positioning system to acquire the base station location information.

5 11. The radio communication system according to claim 9, wherein said terminal location information acquiring means uses a satellite-assisted positioning system to acquire the terminal location information.

10 12. The radio communication system according to claim 9, wherein said transmission timing calculation device stores information on the calculated transmission timing in a nonvolatile memory.

15 13. A base station location information calculation device arranged in a radio base station for calculating location information about location thereof, comprising:

20 base station location information acquiring means for acquiring base station location information which is the location information of the radio base station; and

 base station location information notifying means for notifying the base station location information.

25 14. A transmission timing calculation device arranged in a terminal unit for calculating transmission timing for signal, comprising:

terminal location information acquiring means for acquiring terminal location information which is information about location of the terminal unit;

5 propagation information calculating means for calculating, based on the terminal location information and base station location information which is information about location of a radio base station, propagation information about radio wave propagation between the radio base station and the terminal unit;

10 transmission timing calculating means for calculating, based on the propagation information, transmission timing for signal to be transmitted from the terminal unit to the radio base station; and

15 signal transmitting means for transmitting the signal in accordance with the transmission timing.

15. A radio communication method for performing radio communication control, comprising:

20 acquiring base station location information which is information about location of a radio base station;

 notifying the base station location information;

 acquiring terminal location information which is information about location of a terminal unit;

25 calculating, based on the base station location information and the terminal location information, propagation information about radio wave propagation between the radio base station and the terminal unit;

calculating, based on the propagation information,
transmission timing for signal to be transmitted from the
terminal unit to the radio base station; and

transmitting the signal in accordance with the
5 transmission timing.

ABSTRACT OF THE DISCLOSURE

Radio communication system and method capable of expanding the coverage of a radio base station and thereby permitting efficient radio communications. Continuous time slot allocating unit continuously allocates time slots in a frame to generate a continuous time slot. During the period of the continuous time slot, propagation information calculating unit communicates with a terminal unit to calculate propagation information about radio wave propagation between the radio base station and the terminal unit. Also, during the period of the continuous time slot, transmission timing calculating unit calculates, based on the propagation information, transmission timing for signal to be transmitted from the terminal unit to the radio base station. Signal transmitting unit transmits the signal in accordance with the transmission timing.

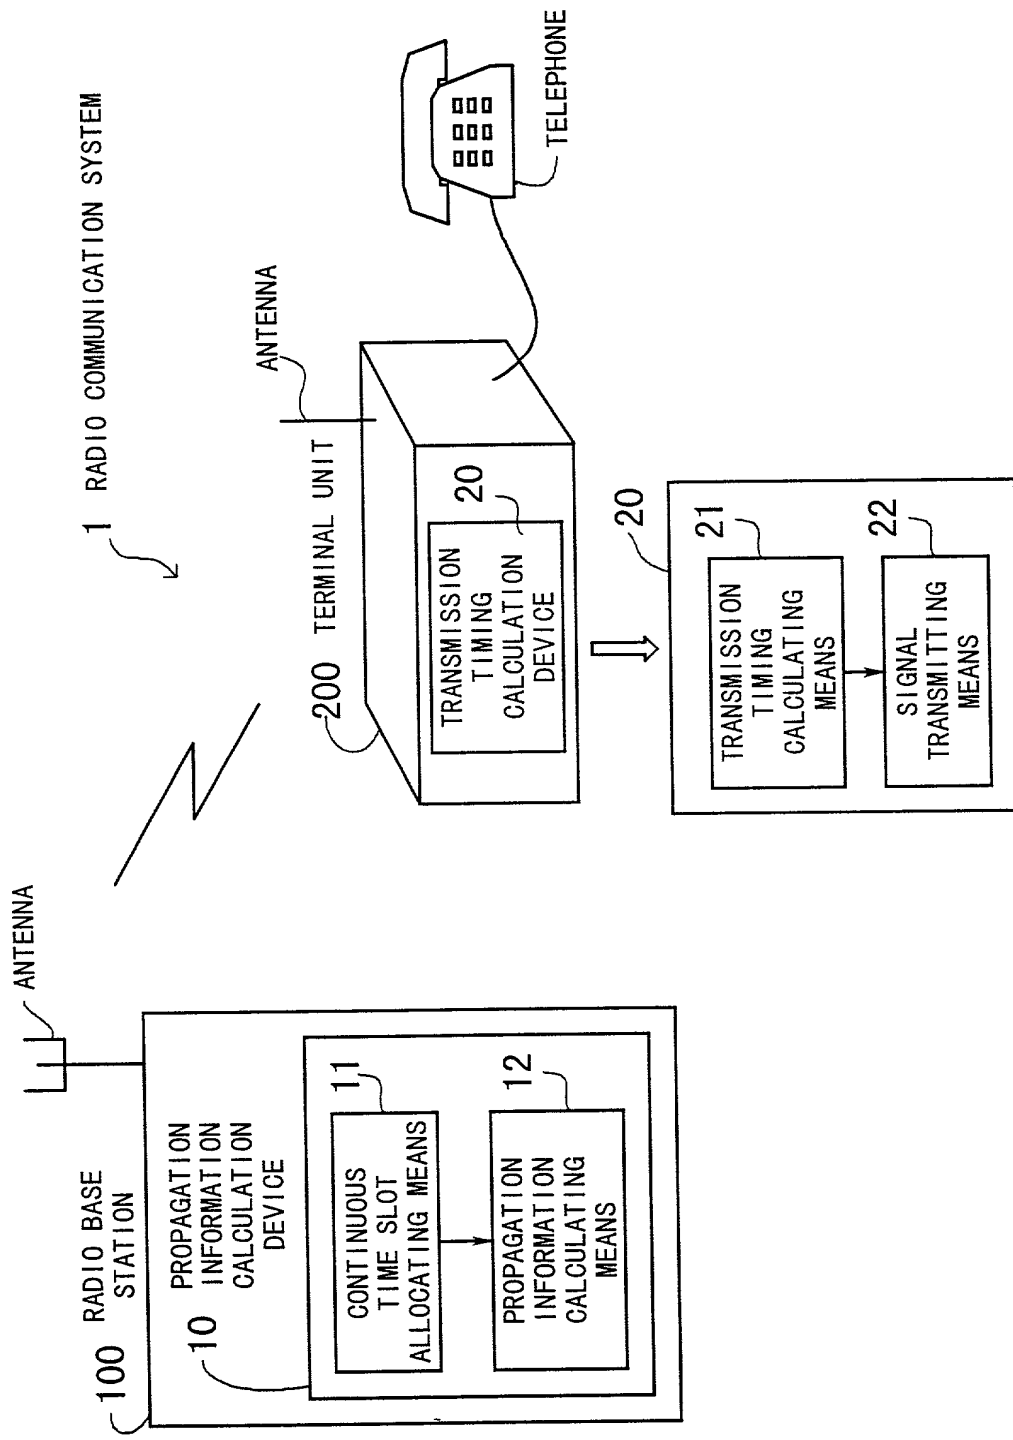
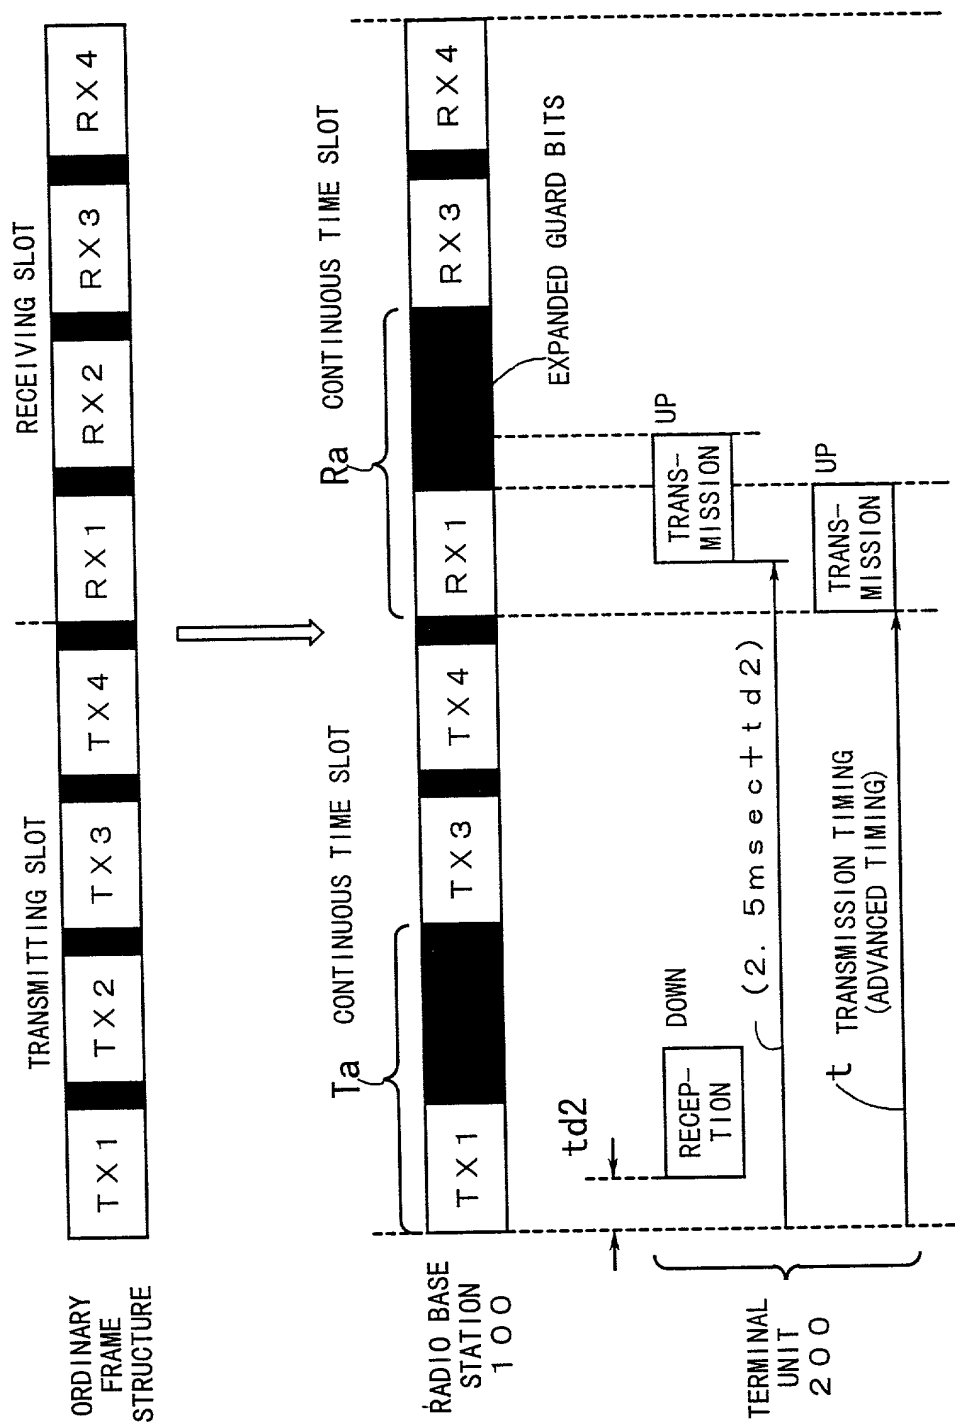


FIG. 1



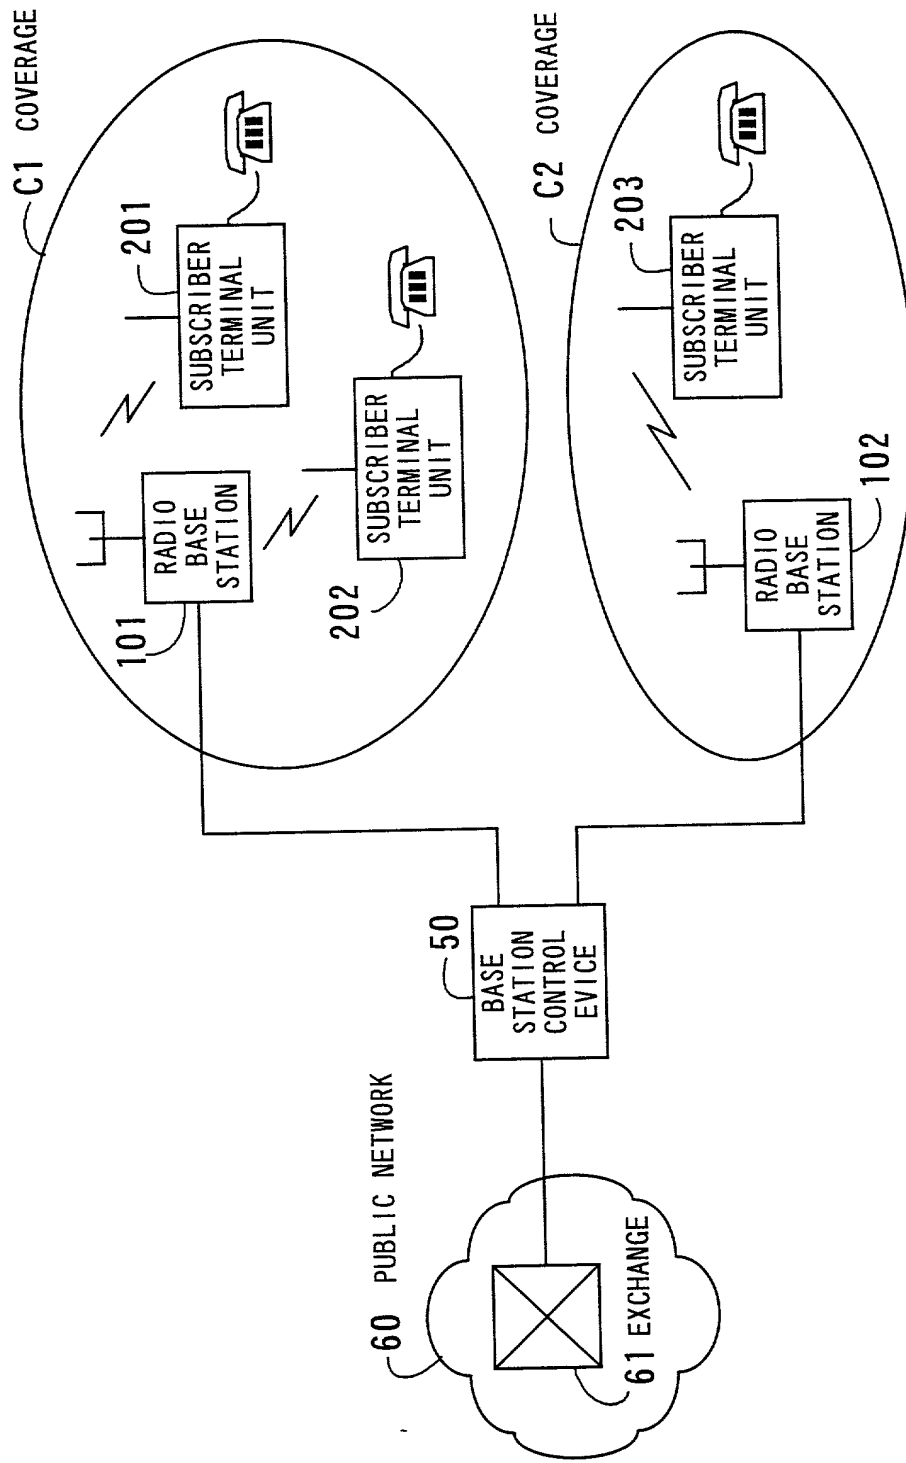


FIG. 3

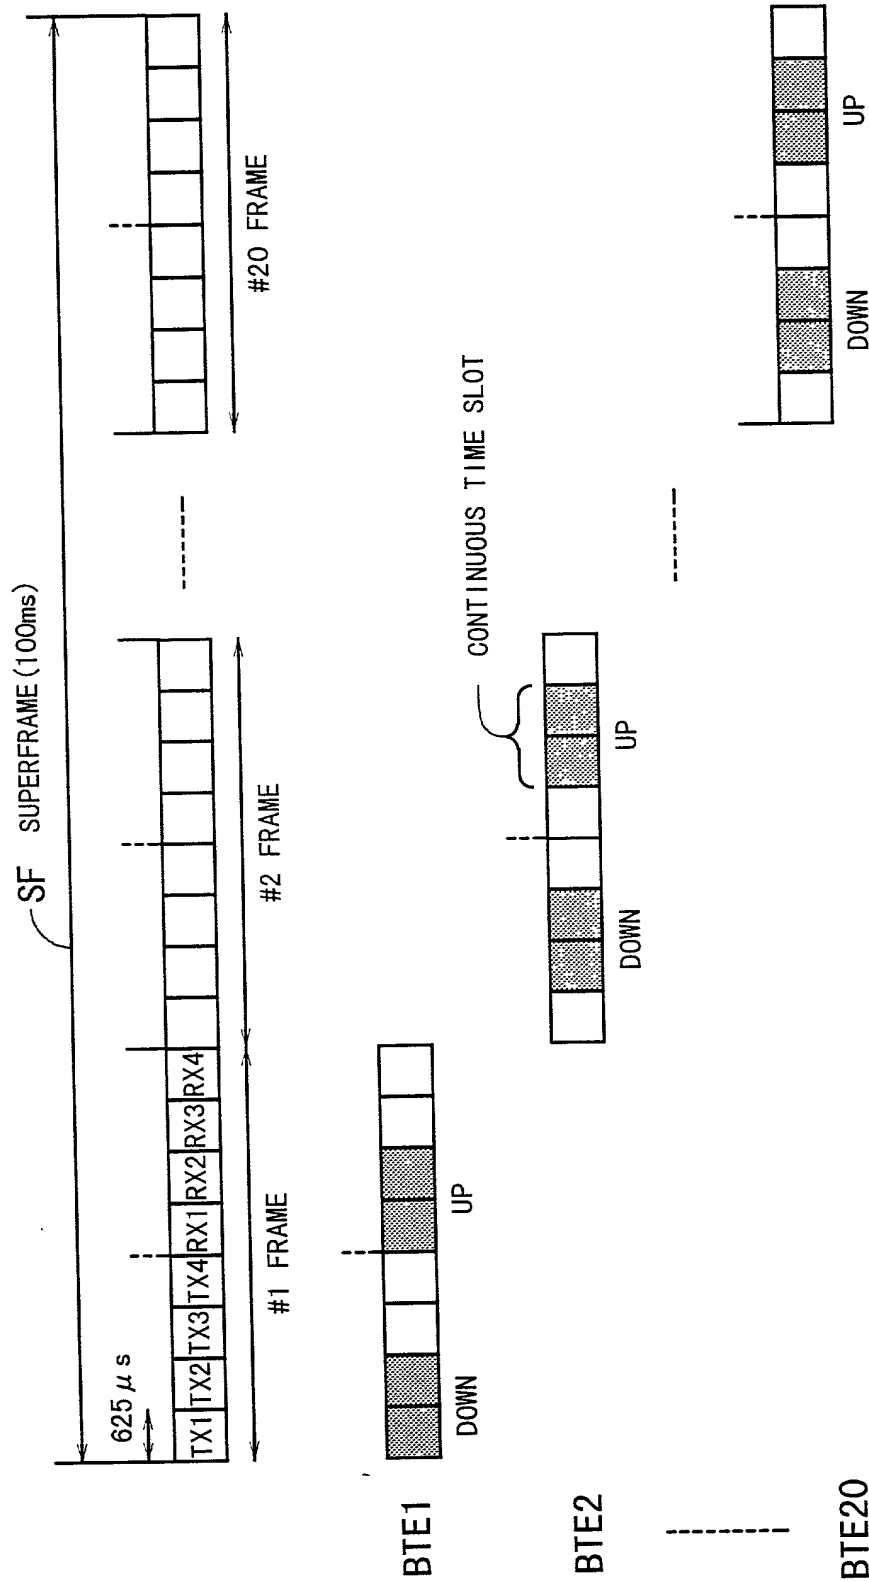


FIG. 4

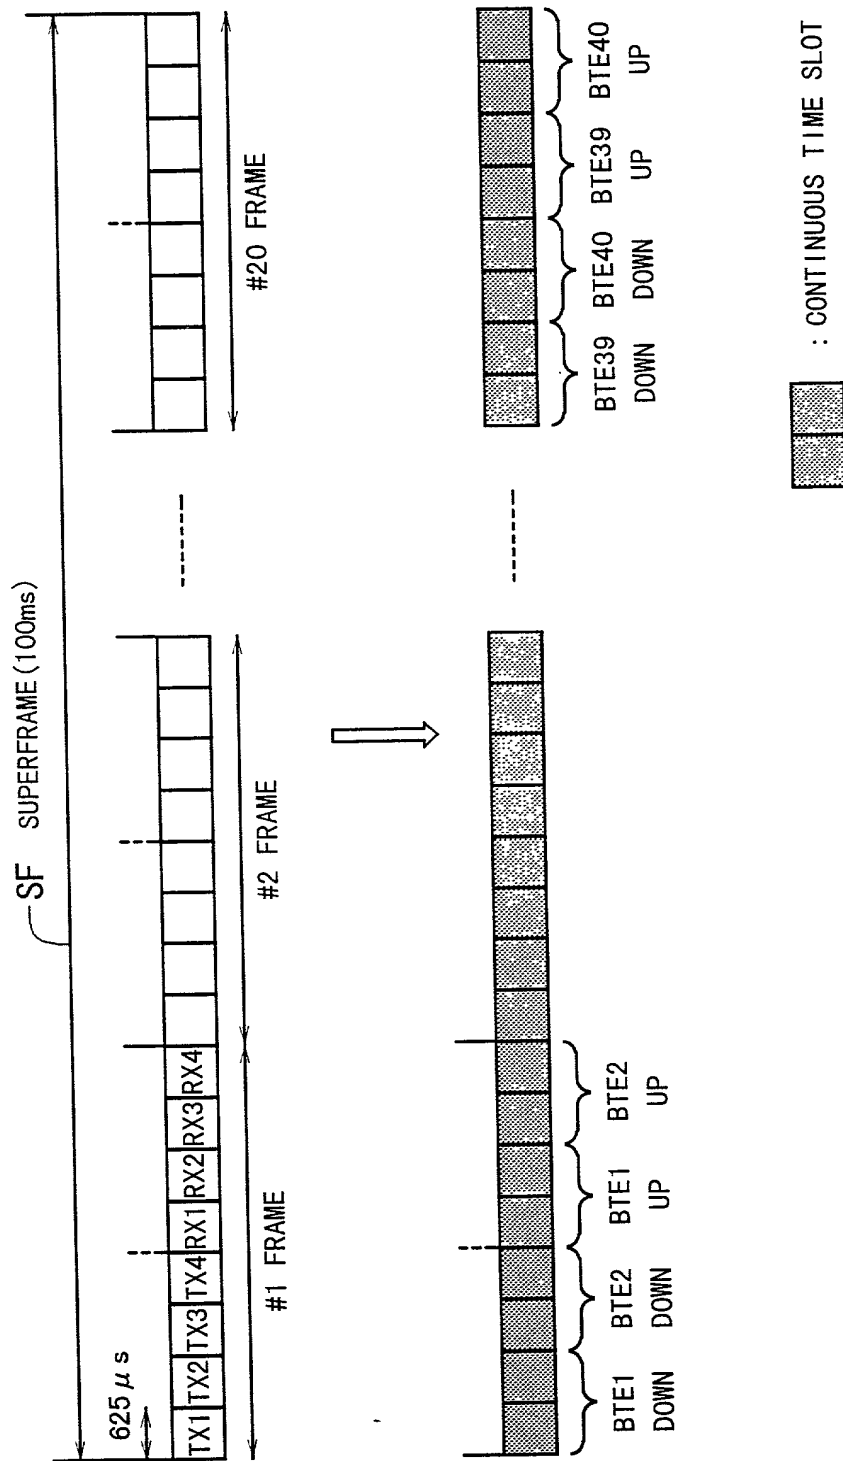


FIG. 5

TERMINAL UNIT 2 0 0

RADIO BASE STATION 1 0 0

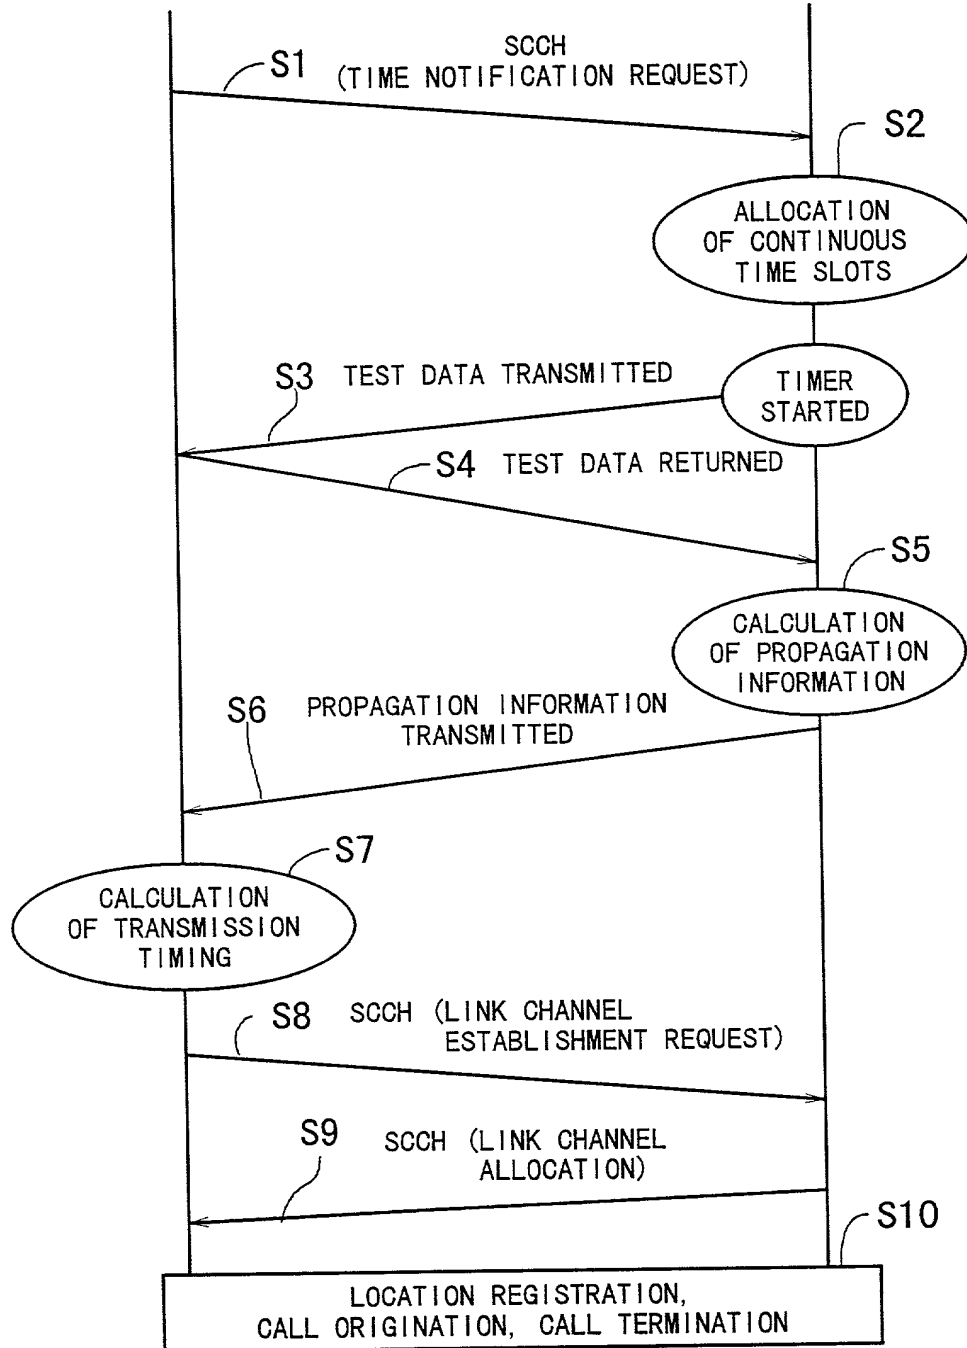


FIG. 6

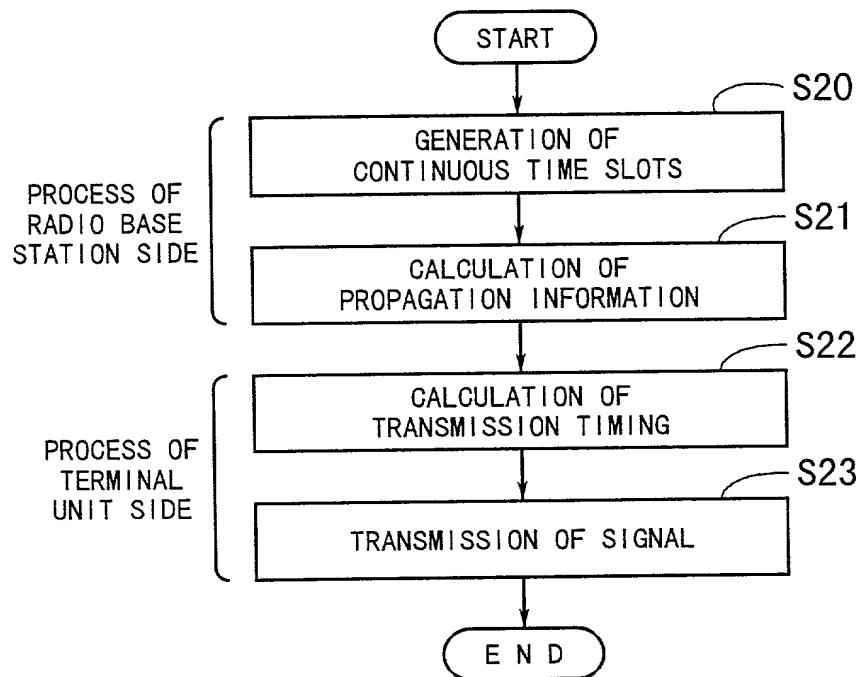


FIG. 7

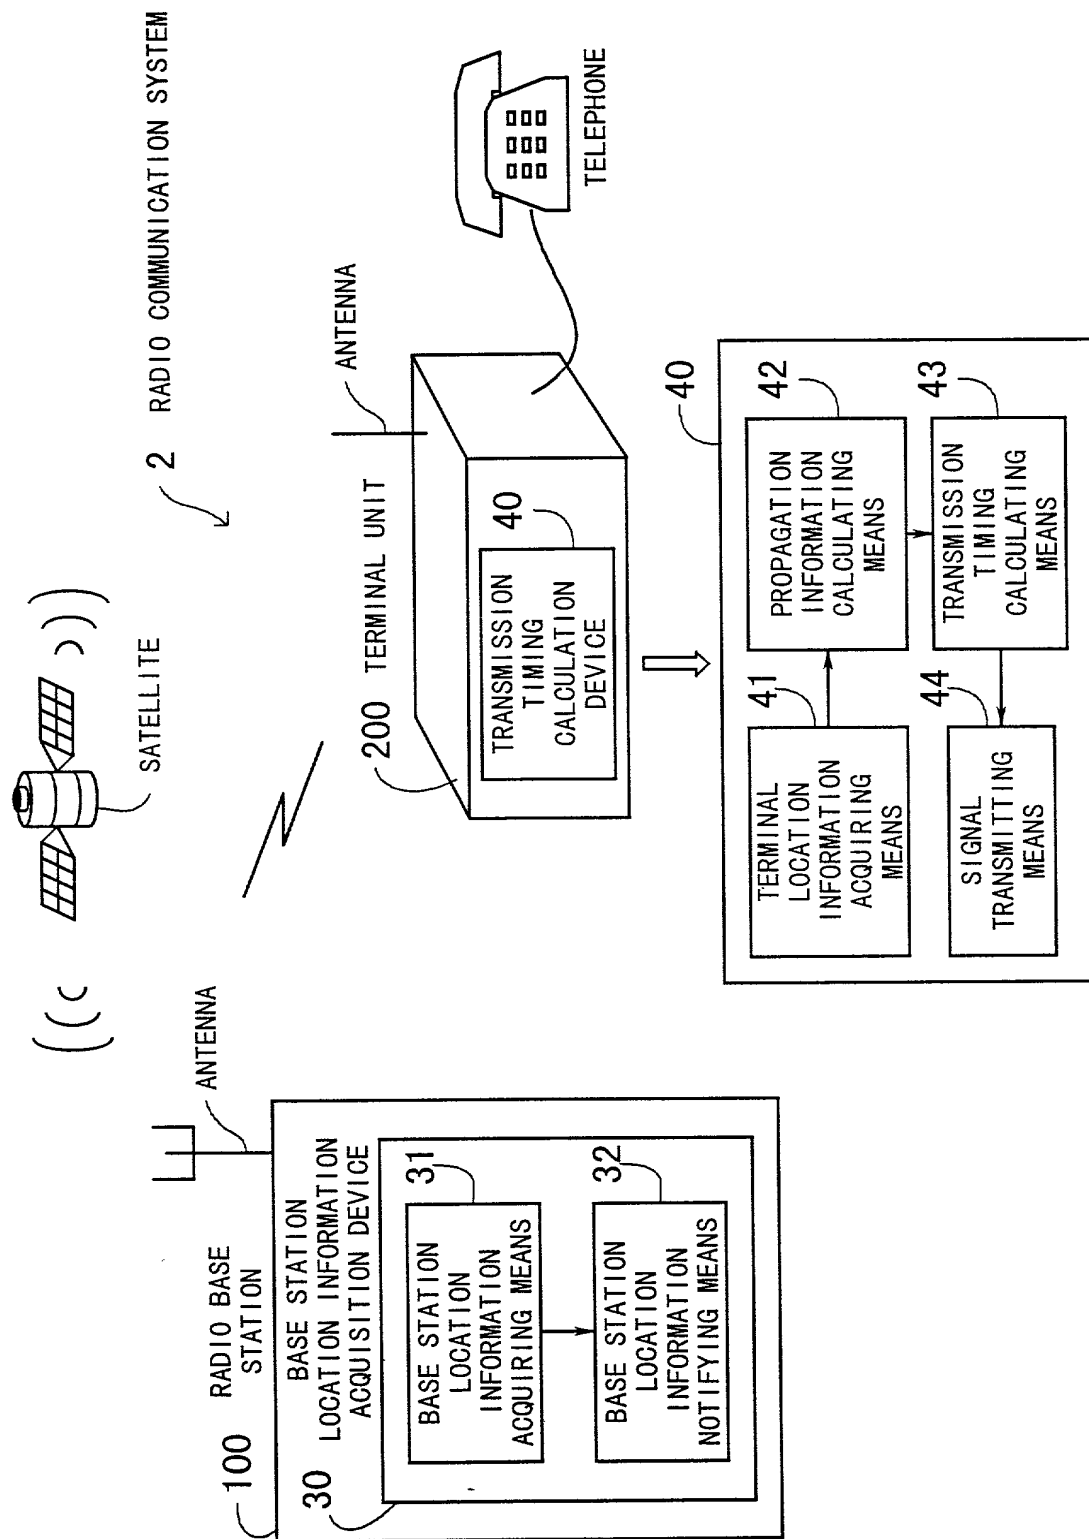


FIG. 8


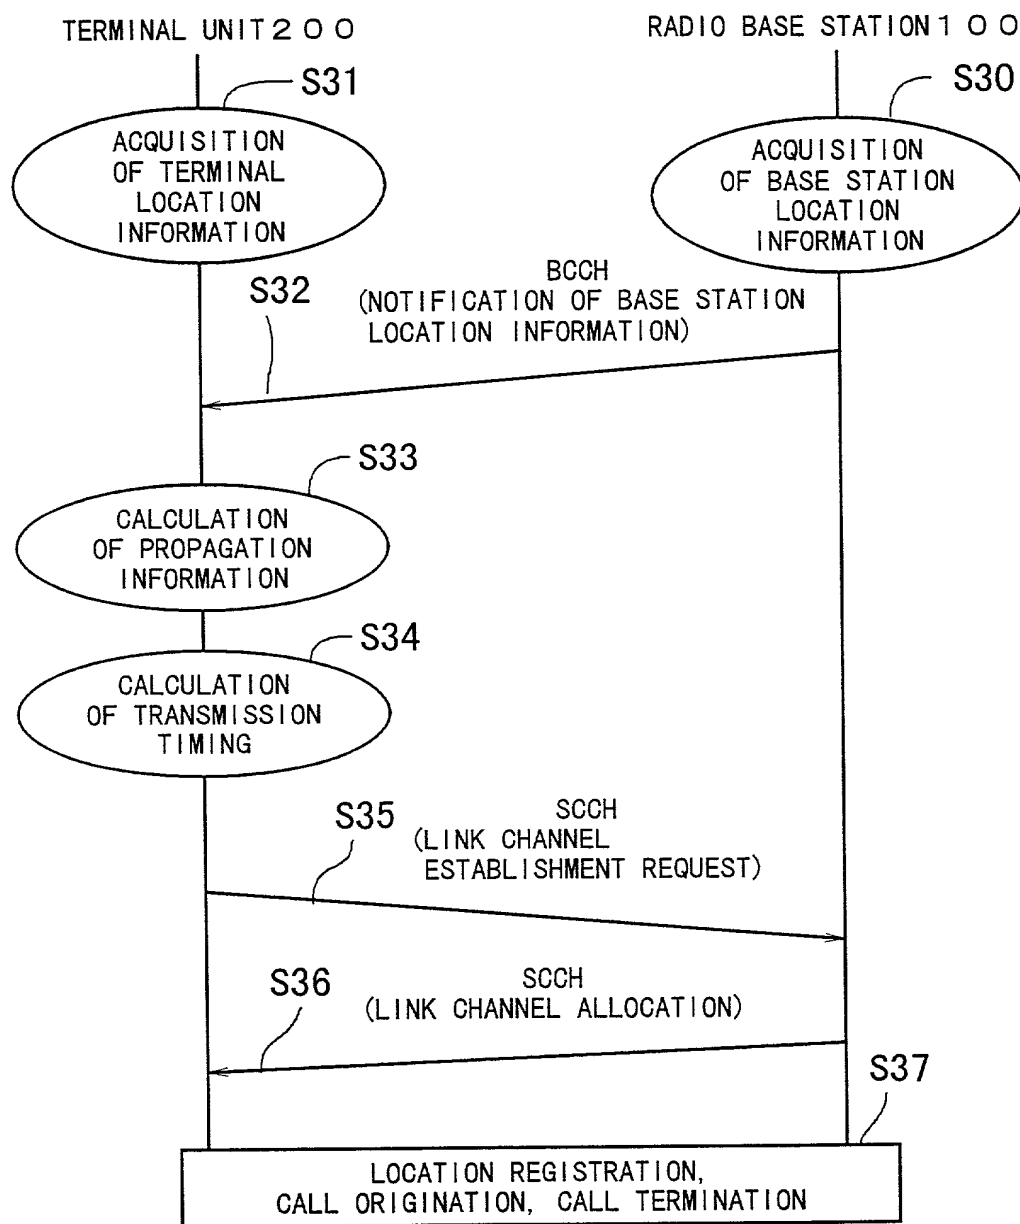


FIG. 9

BCCH

124

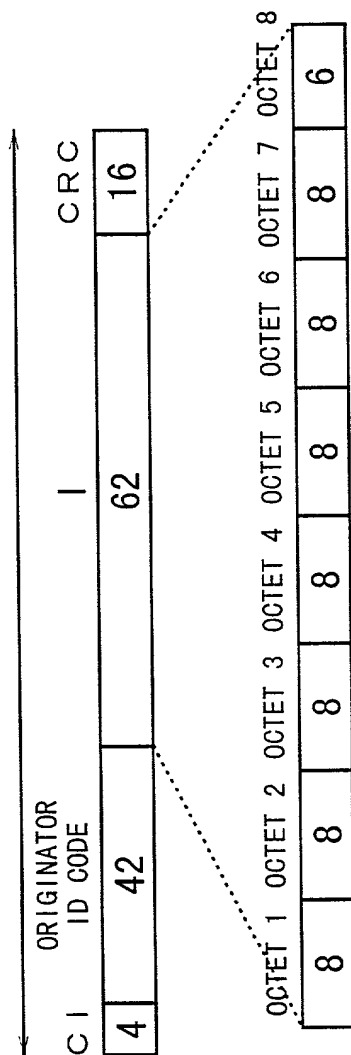

OCTET	BIT	8	7	6	5	4	3	2	1
1	RE-SERVED	0	0	0	1	0	0	0	1
2		LOCH INTERVAL VALUE							
3		TERMINATION GROUPING FACTOR				PAGING AREA NO.			
4		BASE STATION LOCATION INFORMATION							
5		BASE STATION LOCATION INFORMATION							
6		BASE STATION LOCATION INFORMATION							
7		BASE STATION LOCATION INFORMATION							
8									

FIG. 10

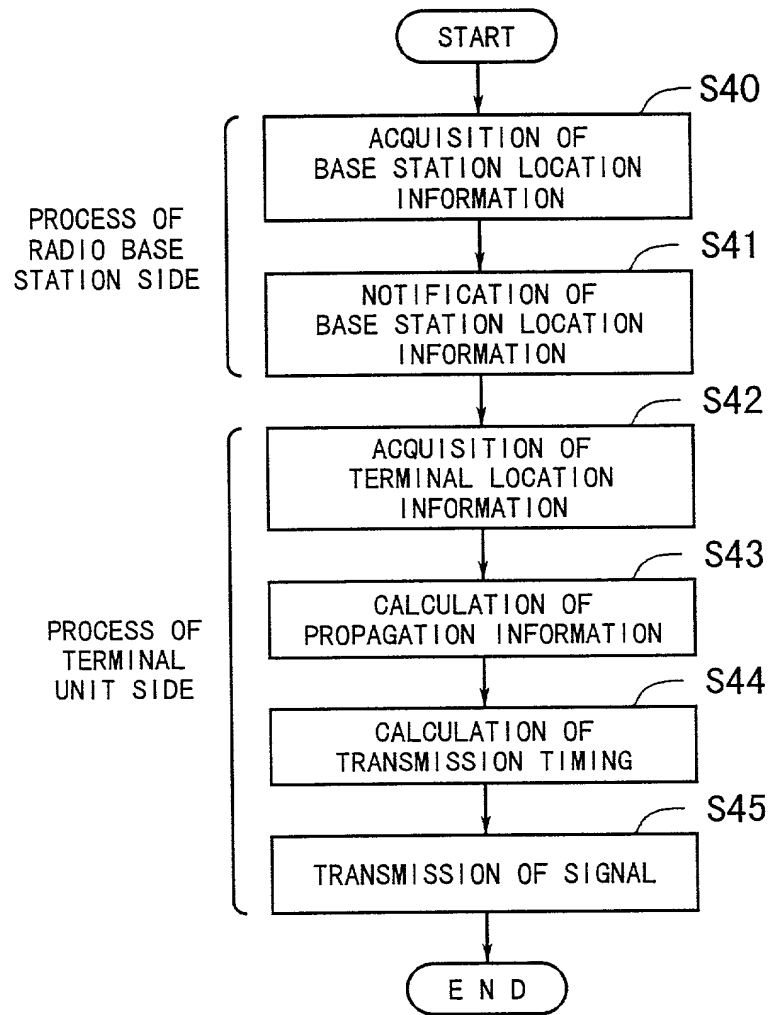


FIG. 11

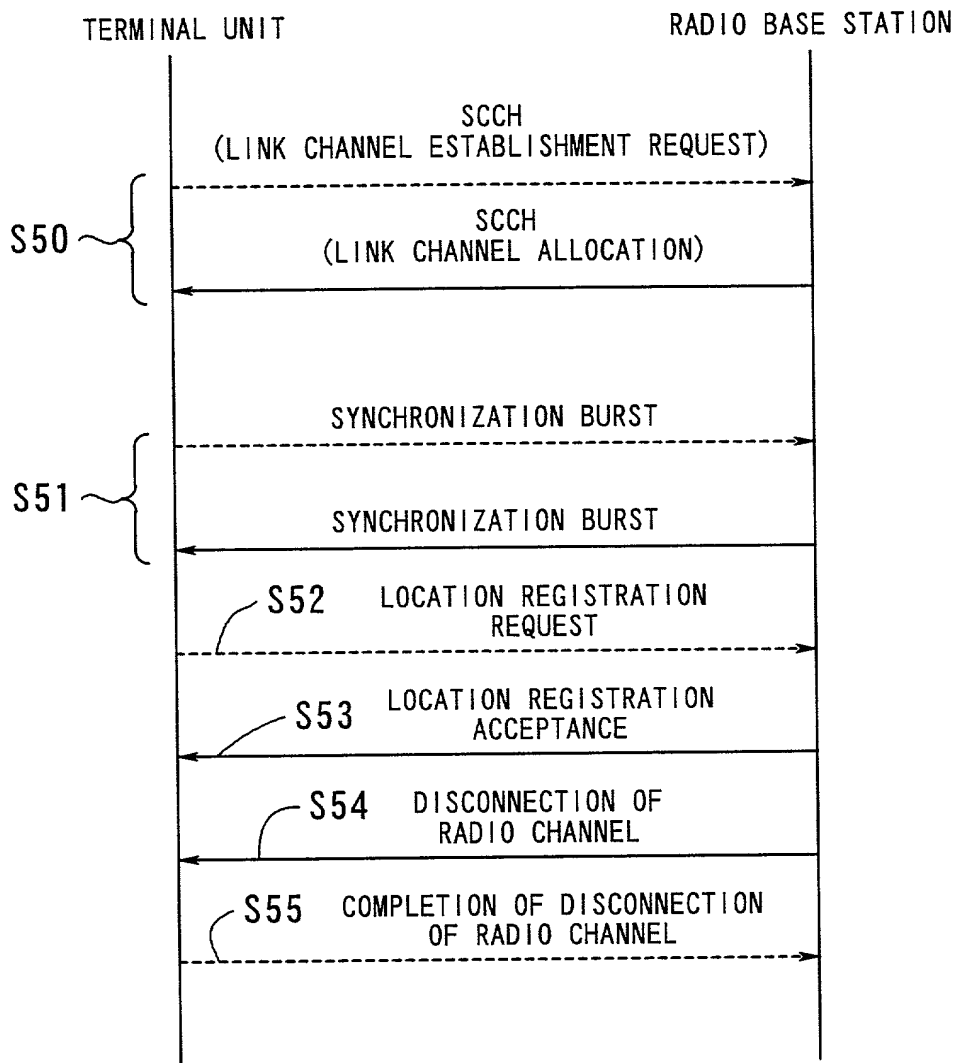


FIG. 12

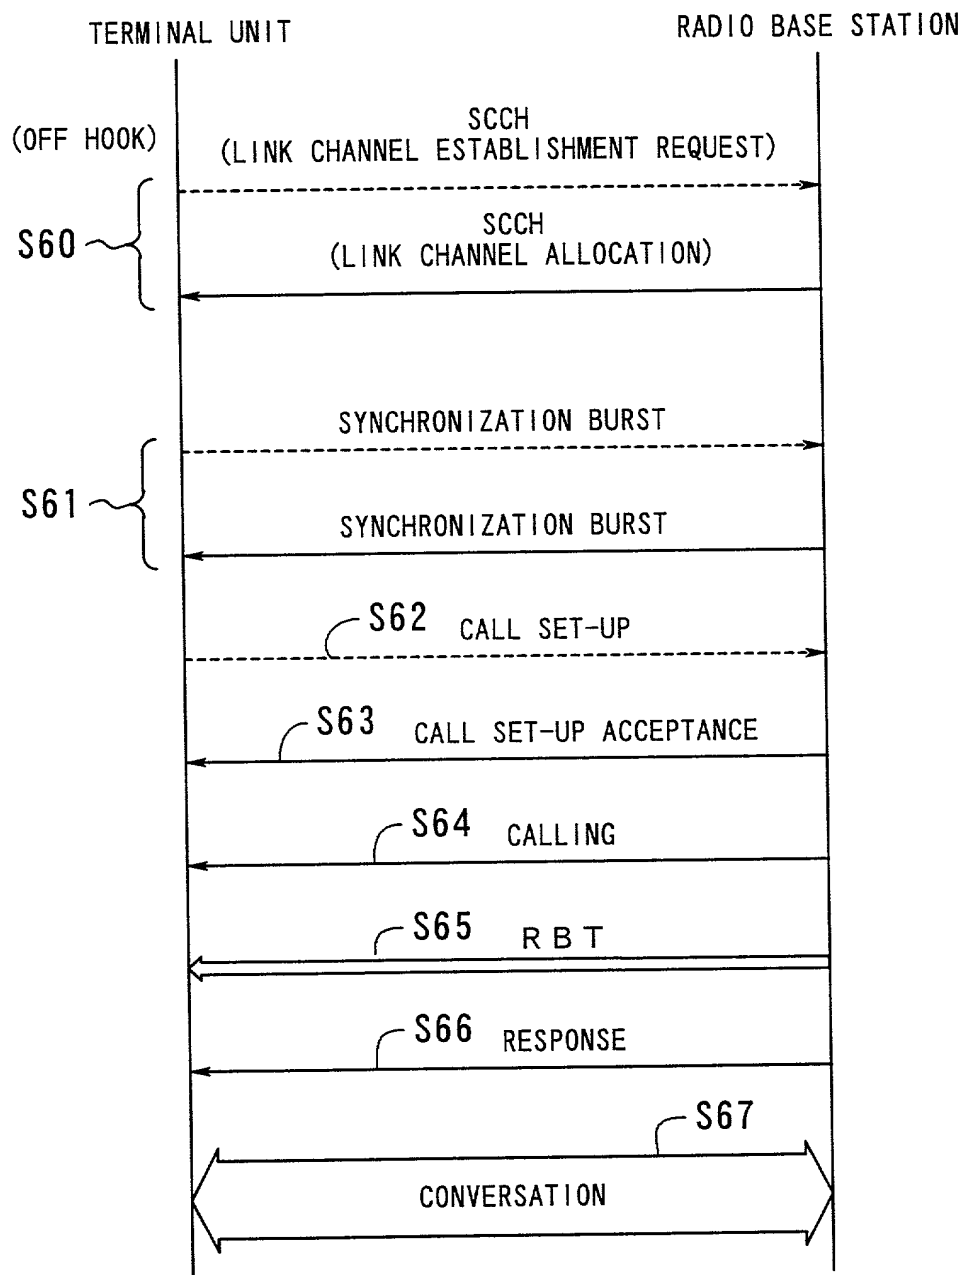


FIG. 13

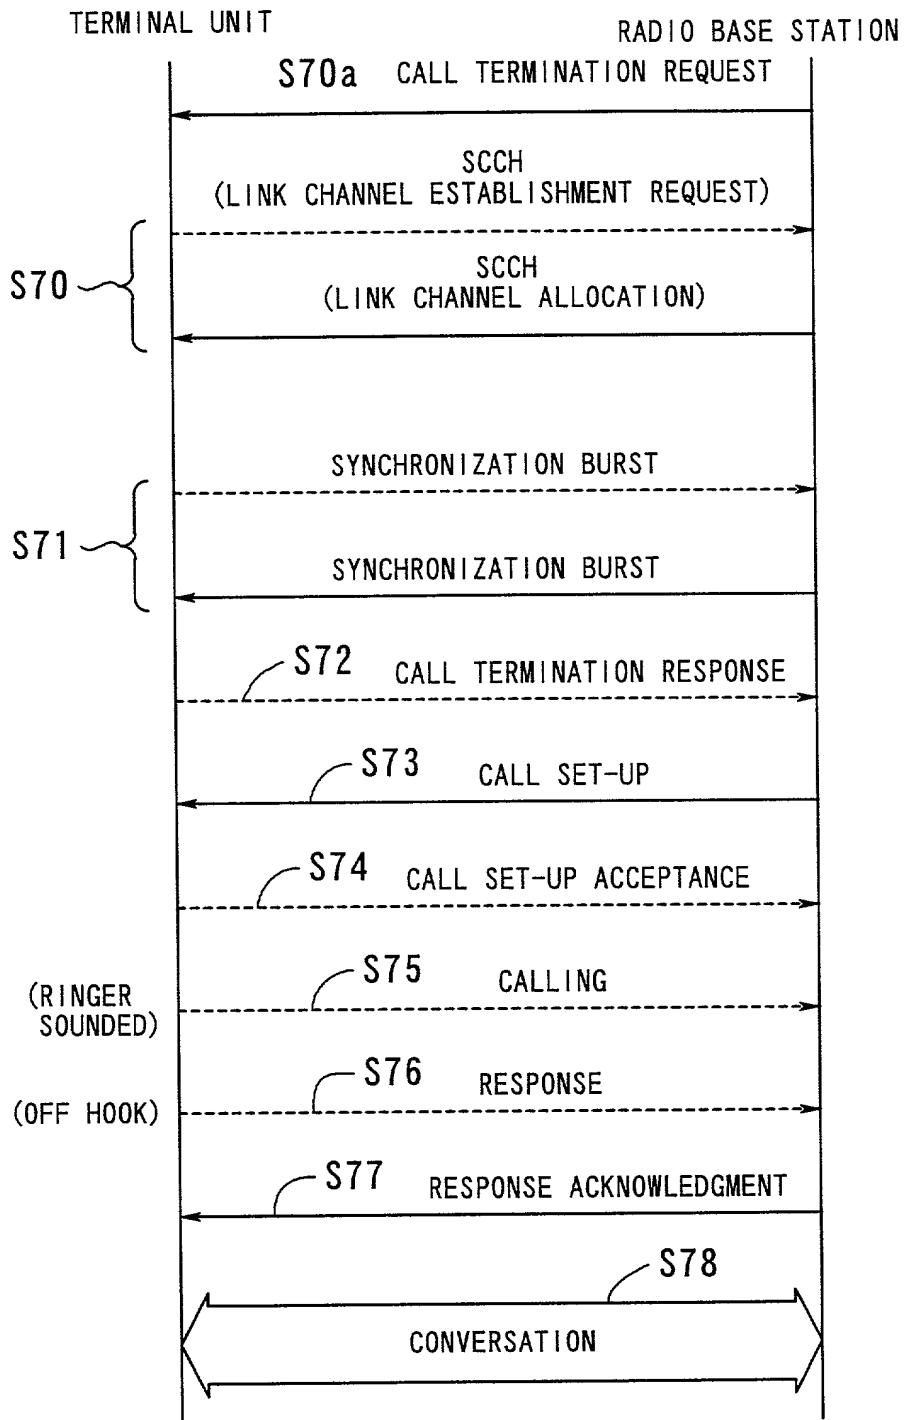


FIG. 14

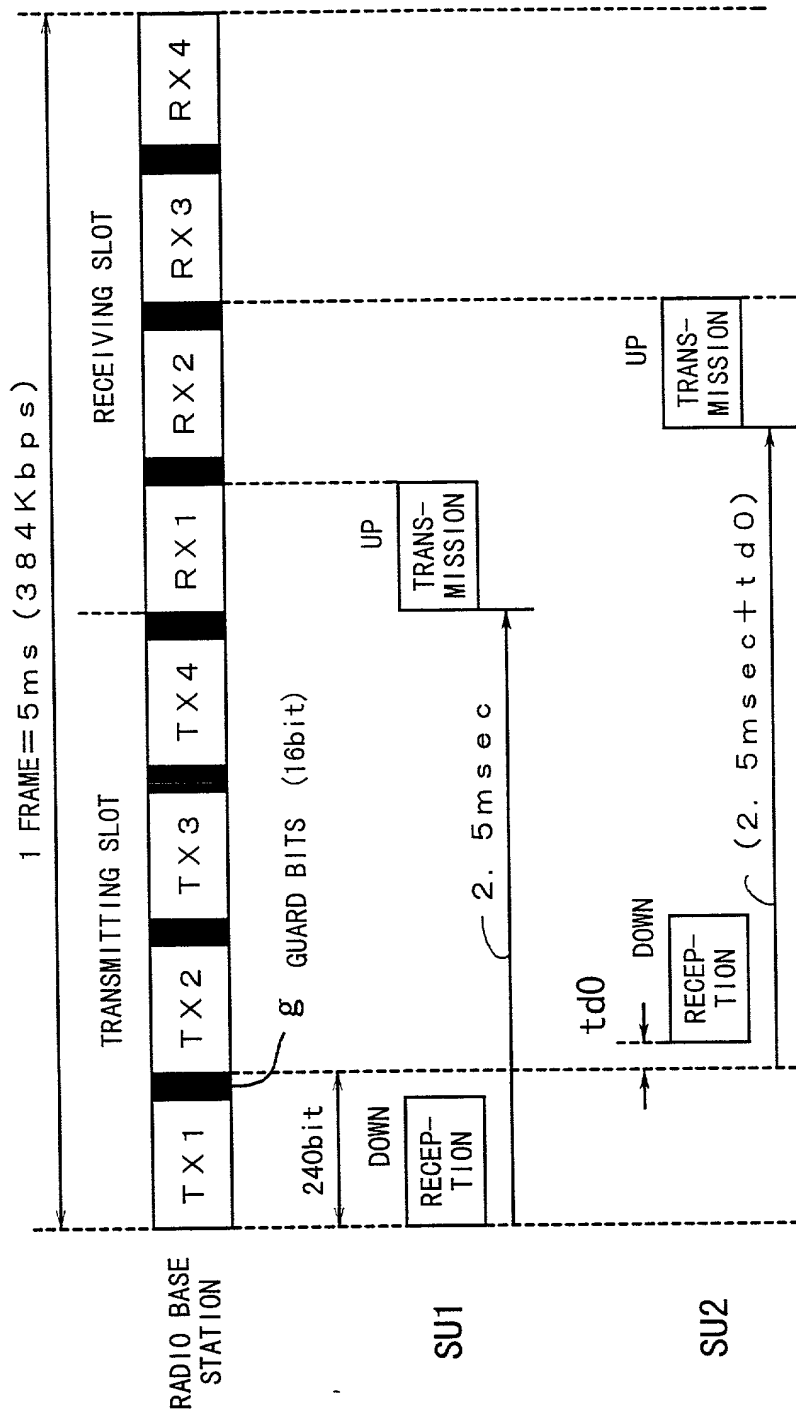


FIG. 15
 PRIOR ART

DOCKET NO.: FUJR 16.535

PTO/SB/106 (8-96)

Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration**日本語宣言書**

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

RADIO COMMUNICATION SYSTEMAND METHOD

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
（該当する場合） _____ に訂正されました。☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration

(日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

11-073178
(Number)
(番号)

Japan
(Country)
(国名)

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

18/03/1999
(Day/Month/Year Filed)
(出願年月日)

☐

(Number)
(番号)

(Country)
(国名)

(Day/Month/Year Filed)
(出願年月日)

☐

私は、第35編米国法典119条(e)項に基づいて下記の米国外の特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外の特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外の特許出願に開示されていない限り、その先行米国外出願提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration
(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

書類送付先

Aaron B. KARAS, Reg. No. 18,923; Samson HELFGOTT, Reg. No. 23,072 and Leonard COOPER Reg. No. 27,625
Send Correspondence to:
HELFGOTT & KARAS, P.C.
Empire State Building, 60th Floor
New York, New York 10118
United States of America

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Helfgott & Karas, P.C.
(212) 643-5000

唯一または第一発明者名	Full name of sole or first inventor	Kenji NEMOTO
発明者の署名	Inventor's signature	Kenji Nemoto
日付	Date	Sept. 17, 1999
住所	Residence	Kawasaki-shi, Kanagawa, Japan
国籍	Citizenship	Japanese
私書箱	Post Office Address	c/o FUJITSU LIMITED, 1-1 - Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588 Japan
第二共同発明者	Full name of second joint inventor, if any	
第二共同発明者	Second inventor's signature	
日付	Date	
住所	Residence	
国籍	Citizenship	
私書箱	Post Office Address	

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)

THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of: Kenji NEMOTO

Filed: : Concurrently herewith

For : RADIO COMMUNICATION SYSTEM AND METHOD

Serial No.: Concurrently herewith

October 25, 1999


Assistant Commissioner of Patents
Washington, D.C. 20231

SUB-POWER OF ATTORNEY

S I R:

I, Samson Helfgott Reg. No. 23,072 attorney of record herein, do hereby grant a sub-power of attorney to Linda S. Chan, Reg. No. 42,400; Jacqueline M. Steady, Reg. No. 44,354 and Harris Wolin, Reg. No. 39,432 to act and sign in my behalf in the above-referenced application.

Respectfully submitted,

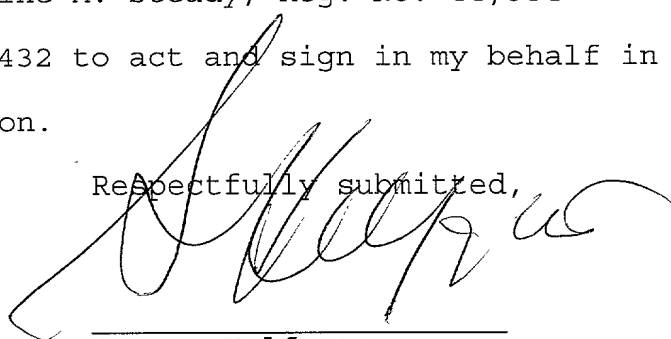

Samson Helfgott
Reg.No 23,072


HELFGOTT & KARAS, P.C.
60th FLOOR
EMPIRE STATE BUILDING
NEW YORK, NY 10118
DOCKET NO.: FUJR16.535
LHH power

Filed Via Express Mail

Rec. No.: EM366876357US

On: October 25, 1999

By



Any fee due as a result of this paper, not covered by an enclosed check may be charged on Deposit Acct. No. 08-1634.

